

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** GLOBOSTAR® GROUP

**Supplier's address:** GLOBOSTAR LED LIGHTING AND ACCESSORIES GROUP, 1st Km Old National Road Katerinis-Thessalonikis 1, 60100 KATERINI KATERINI PIERIAS, EL

**Model identifier:** SKU: 90104

## Type of light source:

|   |                        |                                 |     |
|---|------------------------|---------------------------------|-----|
| Lighting technology used:                           | LED                    | Non-directional or directional: | DLS |
| Light source cap-type (or other electric interface) | WIRES - TERMINAL BLOCK |                                 |     |
| Mains or non-mains:                                 | MLS                    | Connected light source (CLS):   | No  |
| Colour-tuneable light source:                       | No                     | Envelope:                       | -   |
| High luminance light source:                        | No                     |                                 |     |
| Anti-glare shield:                                  | No                     | Dimmable:                       | No  |

## Product parameters

| Parameter | Value | Parameter | Value |
|-----------|-------|-----------|-------|
|-----------|-------|-----------|-------|



### General product parameters:

|  |                             |  |   |
|--|-----------------------------|--|---|
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer  | 500                         | Energy efficiency class  | C   |
| Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 75 000 in Narrow cone (90°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 5 000   |
| On-mode power ( $P_{on}$ ), expressed in W   | 500,0                       | Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal   | 0,00  |
| Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal  | -                           | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set   | 80  |
| Outer dimensions without separate control gear, light-   | Height                      | 450  | Spectral power distribution in the range 250 nm to 800 nm, at full-load |
|  | Width                       | 620  |   |
|  | Depth                       | 220  |   |
|  |                             |  | See image in last page  |

|   |                   |  |                |
|---|-------------------|--|----------------|
| ing control parts and non-lighting control parts, if any (millimetre)   |                   |  |                |
| Claim of equivalent power <sup>(a)</sup>  | Yes               | If yes, equivalent power (W)                                       | 4 000          |
|   |                   | Chromaticity coordinates (x and y)                                 | 0,380<br>0,380 |
| <b>Parameters for directional light sources:</b>  |                   |  |                |
| Peak luminous intensity (cd)  | 11 250            | Beam angle in degrees, or the range of beam angles that can be set | 75             |
| <b>Parameters for LED and OLED light sources:</b>   |                   |  |                |
| R9 colour rendering index value   | 5                 | Survival factor  | 0,95           |
| the lumen maintenance factor  | 0,92              |  |                |
| <b>Parameters for LED and OLED mains light sources:</b>   |                   |  |                |
| displacement factor (cos $\phi_1$ )   | 0,80              | Colour consistency in McAdam ellipses                              | 3              |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | .. <sup>(b)</sup> | If yes then replacement claim (W)                                  | -              |
| Flicker metric (Pst LM)   | 1,0               | Stroboscopic effect metric (SVM)                                   | 0,4            |

(a)'.': not applicable;

(b)'.': not applicable;

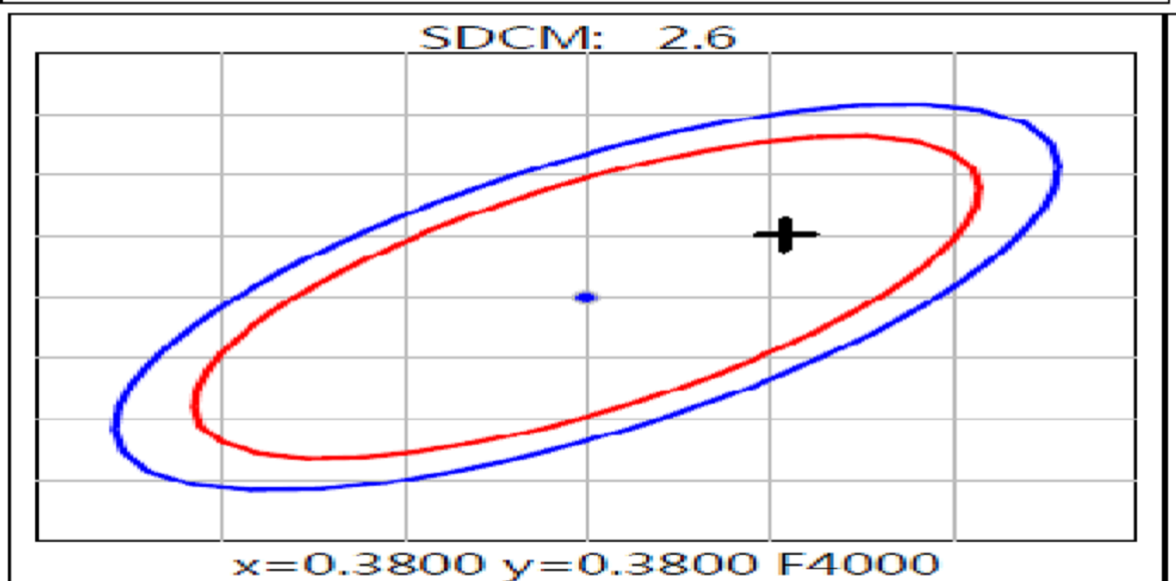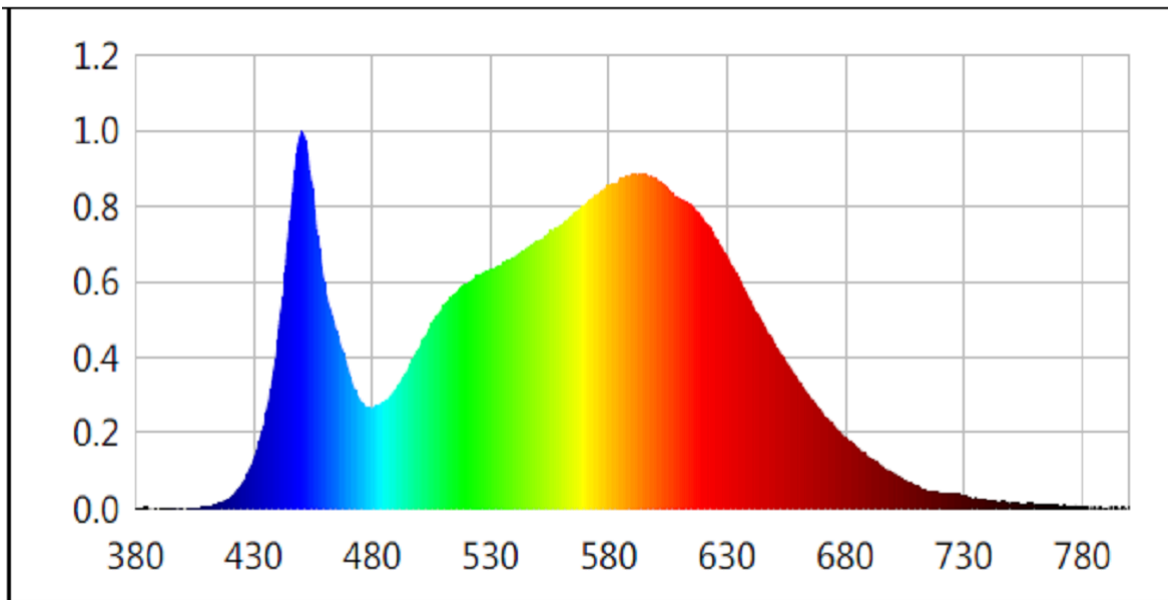

Model placed on the Union market from 24/06/2025.



**EPREL registration number:** 2307208

<https://eprel.ec.europa.eu/qr/2307208>

**Supplier:** GLOBOSTAR GROUP SINGLE MEMBER P.C. (Importer)

**Website:** [www.globostar.gr](http://www.globostar.gr)

**Customer care service:**

**Name:** GLOBOSTAR LED LIGHTING AND ACCESSORIES GROUP

**Website:** [www.globostar.gr](http://www.globostar.gr)

**Email:** [eprel2021@globostar.eu](mailto:eprel2021@globostar.eu)

**Phone:** 00306980878477

**Address:**

1st Km Old National Road Katerinis-Thessalonikis 1  
60100 KATERINI  
Greece