## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: GLOBOSTAR® GROUP

Supplier's address: GLOBOSTAR LED LIGHTING AND ACCESSORIES GROUP, 1st Km Old National

Road Katerinis-Thessalonikis 1, 60100 KATERINI KATERINI PIERIAS, EL

Model identifier: SKU: 90457

Type	of lig	ht so	urce:
------	--------	-------	-------


Lighting technology used:	LED	Non-directional or directional:	DLS	
Light source cap-type	WIRES - TER-			
(or other electric interface)	MINAL BLOCK			
Mains or non-mains:	NMLS	Connected light source (CLS):	No	
Colour-tuneable light source:	No	Envelope:	-	
High luminance light source:	No			
Anti-glare shield:	No	Dimmable:	Yes	


Product parameters						
Parameter		Value	Parameter	Value		
General product parameters:						
Energy consur mode (kWh/10 up to the neare	00 h), rounded	6	Energy efficiency class	E		
dicating if it refe a sphere (360º)	s flux (фuse), in- ers to the flux in , in a wide cone arrow cone (90º)	690 in Nar- row cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 500		
On-mode power (P <sub>on</sub> ), expressed in W		6,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00		
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80		
Outer dimen-	Height	80	Spectral power dis-	See image		
sions without	Width	175	tribution in the	in last page		
separate control gear, light-	Depth	45	range 250 nm to 800 nm, at full-load			

ing control parts and non-lighting control parts, if any (millimetre)						
Claim of equivalent power <sup>(a)</sup>	Yes	If yes, equivalent power (W)	55			
		Chromaticity coordi-	0,380			
		nates (x and y)	0,380			
Parameters for directional light sources:						
Peak luminous intensity (cd)	104	Beam angle in degrees, or the range of beam angles that can be set	15			
Parameters for LED and OLED light sources:						
R9 colour rendering index value	5	Survival factor	0,95			
the lumen maintenance factor	0,92					

(a)<sub>'-'</sub>: not applicable;

(b)<sub>'-'</sub> : not applicable;

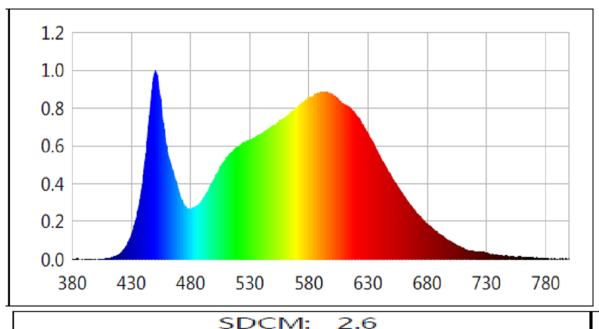

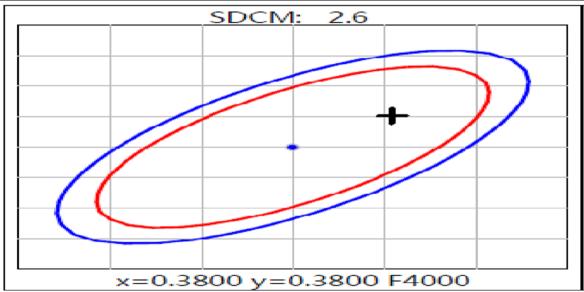

Model placed on the Union market from 24/06/2025.



EPREL registration number: 2314771 <a href="https://eprel.ec.europa.eu/qr/23">https://eprel.ec.europa.eu/qr/23</a>

14771

Supplier: GLOBOSTAR GROUP SINGLE MEMBER P.C. (Impo Website: www.globostar.gr

rter)

**Customer care service:** 

Name: GLOBOSTAR LED LIGHTING AND ACCESSORIES G Website: www.globostar.gr

**ROUP** 

Email: eprel2021@globostar.eu Phone: 00306980878477

Address:

1st Km Old National Road Katerinis-Thessalonikis 1

60100 KATERINI

Greece